



Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power (75/65/20°C) [W]	Power (75/65/24°C) [W]	Power (55/45/24°C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
ST00376180014J081000	376	1800	76	50	61	1690	2,01	25	15,3	734	659	316	-
ST00376200014J081000	376	2000	76	50	61	1890	2,23	27,5	16,9	813	729	344	-
ST00472180014J081000	472	1800	76	50	61	1690	2,52	31,6	19,1	921	829	402	-
ST00472200014J081000	472	2000	76	50	61	1890	2,80	34,7	21,1	1021	918	445	-
ST00568180014J081000	568	1800	76	50	61	1690	3,04	37,9	23,0	1111	999	484	-
ST00568200014J081000	568	2000	76	50	61	1890	3,37	41,6	25,4	1230	1106	536	-

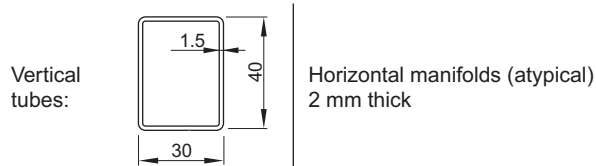

Finishing and warranty:	Electrophoresis + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	set for assembly on the wall; steel box brackets – the same colour as the radiator
Valve:	order separately
Heater:	-
Working pressure:	10 bars
Maximum temperature:	95°C
Connections:	 inner threads G 1/2 air-vent plug G 1/2 screwed in the upper hole of the collector, included
Accessories:	order separately

